



Triclad EnduroClad

Non-Corner Flashing Optional Detail:

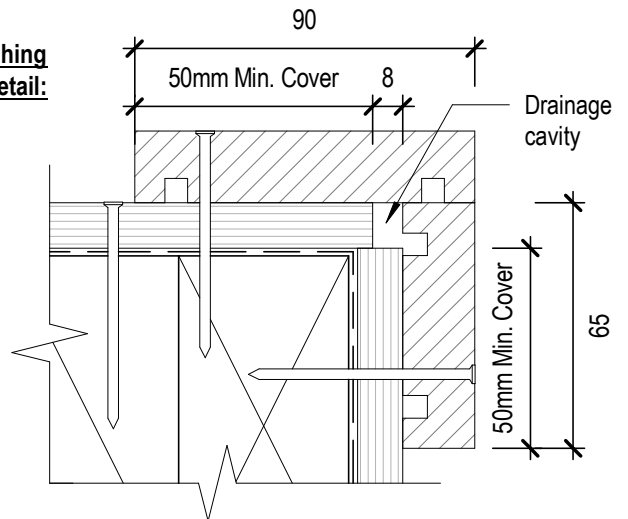

Timber facing boards, rip to suit cover
65 x 3.2mm jolt head nails at 300 centres

Blocking where required

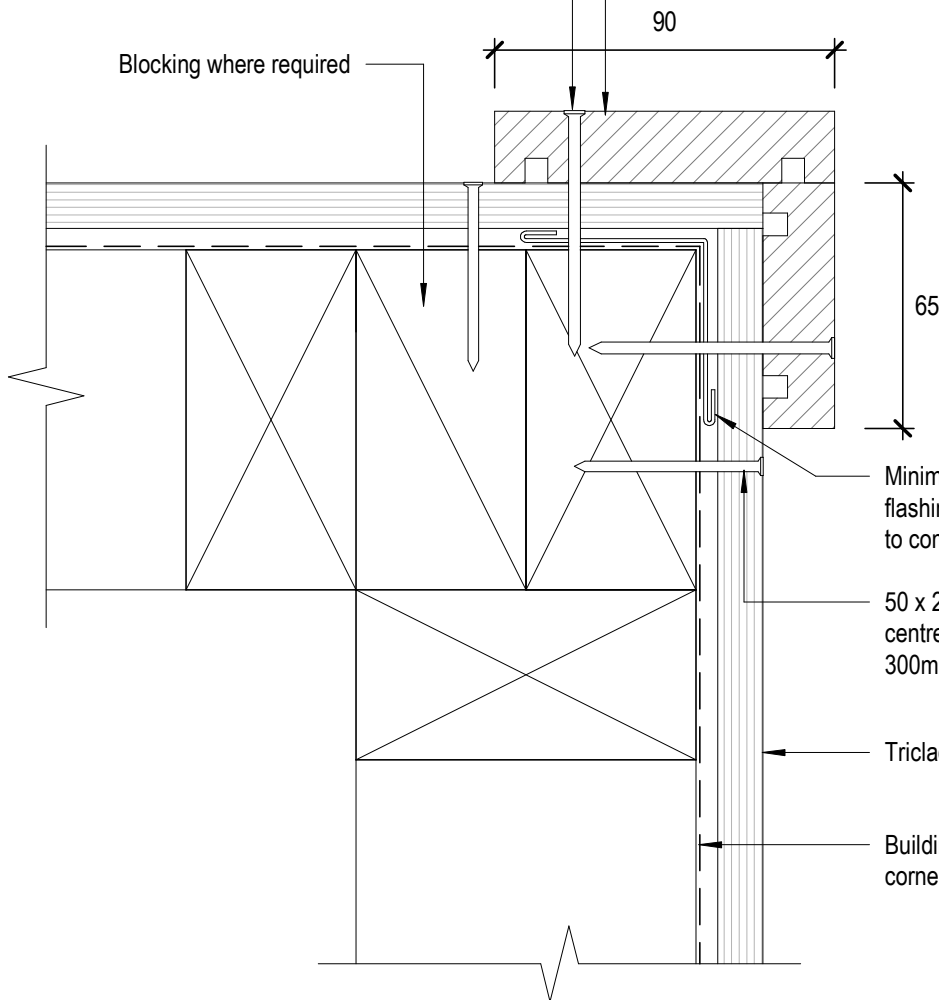

Minimum 50x50mm external corner flashing hem edge folds compatibility to comply with NZBC E2/AS1

50 x 2.8mm flat head nails at 150mm centres around perimeter of board, 300mm centres in middle of board

Triclad EnduroClad Board

Building underlay continuous around corner as per E2/AS1 Table 23



TRICLAD
CLADDING SYSTEMS

8 Quail Place
Hamilton Lake
Hamilton
New Zealand

Direct Fix External Corner-Boxed

T. 0800 874 2523

E. sales@triclad.co.nz

www.triclad.co.nz

1 : 2 @ A4
Scale

Dec 2019
Date

Fig 23
Dwg